

HUMVEE®



2-CT™

U.S. MILITARY DESIGNATION: HMMWV M1152

With over 35 years of upgrades and improvements, iconic and proven HUMVEE vehicles are ready, robust, effective and affordable.

More than 300,000 HUMVEE vehicles have been distributed worldwide in over 70 countries and are the most critical vehicles in the fleet today. The 2-CT provides a rugged chassis combined with a powerful engine to

handle armor kits. Ready to meet multiple mission sets, this vehicle is transportable and can be air dropped or sling loaded via helicopter.

Designed to nearly carry the weight of another vehicle, the flexible 2-CT can be equipped with a 9-soldier safety-enhanced troop kit and a variety of command, control and electronic equipment shelters.

READY NOW
WITH YOU IN THE FUTURE

Transportable by land, sea, air
Armor-ready
Rugged performance
Scalable protection

AM General®

2-CT™



GWW

USA, all configurations: 12,100 lb. (5,488 kg)
International, all configurations: 13,500 lb. (6,124 kg)

PAYLOAD

USA

Base vehicle: 5,100 lb. (2,313 kg)
w/A-Kit: 5,000 lb. (2,268 kg)
w/A- and B-Kits: 3,340 lb. (1,515 kg)

International

Base vehicle: 6,920 lb. (3,139 kg)
w/A-Kit: 6,220 lb. (2,821 kg)
w/A- and B-Kits: 4,560 lb. (2,068 kg)

POWERTRAIN

4-speed automatic transmission

2-speed transfer case, ratios:
high - 1:1, low - 2.72:1

Hypoid front & rear differentials; 3.08:1 ratio

V8, 6.5L turbocharged diesel engine

190 hp (142 KW) @ 3,400 rpm

380 lb-ft (515 N·m) @ 1,700 rpm torque

25 gal. (95 L) fuel capacity

ELECTRICAL

Dual Voltage 14V/28V

MOBILITY

Seating for two soldiers


Aggressive angles of approach, departure,
and ramp breakover

High climb capacity

37 x 12.5R-16.5 tires


Integrated deep water fording; increased
capability with kit

Scalable Protection




Base Vehicle

Armor-ready




w/ A-Kit

Enhanced armor in specific
vehicle areas



w/ B-Kit

Adds plant- or field-installable
perimeter protection (requires A-Kit)

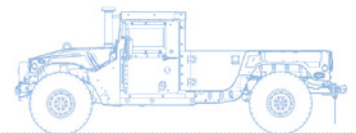

w/FRAG 5

Enhanced perimeter protection
and additional armoring points
(requires A- and B-Kits)

Photos courtesy of DVIDS (Defense Visual Information Distribution Service), publicly released.
Left: U.S. Navy photo by Mass Communication Specialist 2nd Class Kenneth Gardner/Released.
Top: U.S. Army photo by Staff Sgt. Joseph Truckley. Middle: U.S. Army photo by Sgt. Thomas Mort,
12th CAB.

The appearance of U.S. Department of Defense (DoD) visual information does not imply or constitute DoD endorsement.



AM General Headquarters

105 N. Niles Ave
South Bend, IN 46617
(574) 237-6222

www.amgeneral.com